

Express Mail:EL533625728US

06-01-00

05/31/00
1545 U.S. PTOPlease type a plus sign (+) inside this box → ☒Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL		Attorney Docket No. RCA 88740
		First Inventor or Application Identifier Otte
		Title Method and Apparatus for enhancing
(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))		Express Mail Label No. EL533625728US

APPLICATION ELEMENTS	ADDRESS TO:
See MPEP chapter 600 concerning utility patent application contents.	Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 15] (preferred arrangement set forth below) <ul style="list-style-type: none">- Descriptive title of the Invention- Cross References to Related Applications- Statement Regarding Fed sponsored R & D- Reference to Microfiche Appendix- Background of the Invention- Brief Summary of the Invention- Brief Description of the Drawings (if filed)- Detailed Description- Claim(s)- Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) <ul style="list-style-type: none">a. <input type="checkbox"/> Computer Readable Copyb. <input type="checkbox"/> Paper Copy (identical to computer copy)c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 4]	
4. Oath or Declaration [Total Pages] <ul style="list-style-type: none">a. <input type="checkbox"/> Newly executed (original or copy)b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed)<ul style="list-style-type: none">i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	ACCOMPANYING APPLICATION PARTS <ul style="list-style-type: none">7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)9. <input type="checkbox"/> English Translation Document (if applicable)10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]11. <input type="checkbox"/> Preliminary Amendment12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)13. <input type="checkbox"/> * Small Entity Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)15. <input type="checkbox"/> Other:

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____

Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS					
<input type="checkbox"/> Customer Number or Bar Code Label			or <input checked="" type="checkbox"/> Correspondence address below		
(Insert Customer No. or Attach bar code label here)					
Name	Joseph S. Tripoli				
	THOMSON multimedia Licensing Inc.				
Address	P.O. Box 5312				
City	Princeton	State	NJ	Zip Code	08543-5312
Country	U.S.A	Telephone	609-734-9443	Fax	609-734-9700

Name (Print/Type)	Paul P. Kiel	Registration No. (Attorney/Agent)	40,677
Signature	<i>Paul P. Kiel</i>	Date	5/31/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

METHOD AND APPARATUS FOR ENHANCING AN INFRARED SIGNAL PROTOCOL

BACKGROUND OF THE INVENTION

5 1. Field of Invention

The present invention relates to a transport protocol. More particularly, the invention relates to a transport protocol for communicating control signals from remote control devices, including an infrared keyboard and pointing device, to an electronic
10 device.

2. Related Art

Set-top boxes are utilized by consumers for receiving multimedia signals from service providers such as satellite and cable. The set-top box is also capable of
15 receiving signals from remote control devices, such as a television remote control, as well as a keyboard or pointing device. These remote devices allow a subscriber of services (user) to interface with the multimedia or computer software that is viewed on a display panel that is coupled to the set-top box. The keyboard and pointing device (e.g., mouse) interface with a processor in the set-top box via pulsed infrared (IR)
20 signals. However, signal protocols used by such remote control devices, in particular infrared protocols, may not have enough flexibility to support the number of keycodes needed for a keyboard device, or the speed of transmissions necessary for a pointing device. Several off the shelf solutions are available to solve the problem with a range of protocols, however the majority of them are designed to interface with an additional
25 designated processor, which is prohibitively expensive.

A current physical layer format utilizes a four pulse position modulation (4PPM) data encoding technique prior to transmitting the infrared signal. The pulse position modulation encoding is achieved by defining a data symbol interval and subsequently subdividing the data symbol interval into equal time slices called "chips". In PPM
30 schemes, each chip position within a data symbol represents one of the possible bit combinations. Logical "1" represents a chip interval when the transmitting light emitting diode (LED) is emitting light, while a logical "0" represents a chip interval when the LED is off. Thus, 4PPM data encoding includes four chips corresponding to 4

equal time segments. For example, a symbol duration of 500 nsec has four 125 nsec chip intervals.

The following Table 1 correlates each data bit pair with a corresponding 4PPM data sequence, or symbol.

Data Bit Pair (DBP)	4 PPM Data Symbol
00	1000
01	0100
10	0010
11	0001

Table 1

Because there are four unique chip positions within each symbol in 4 PPM, four intervals exist in which only one chip is logically a "one" while all other chips are logically a "zero". As such, each symbol represents two data bits or a "data bit pair." In this manner, a packet containing illustratively 40 bits representing a letter, number, or command selected by a user on the keyboard, is represented by 20 symbols modulated onto a carrier and transmitted from an infrared serial port on the keyboard to the set-top box.

A problem with signal detection by a remote control receiver, particularly with regard to the 4 PPM scheme, has been observed when two infrared pulses occur back to back. For example, when data bit pairs 11 and 00 are sent sequentially such that the chip sequence is 00011000. This occurs in instances where hardware that generates interrupts is only capable of generating an interrupt on a rising edge or on a leading edge of an incoming signal, and does not know the length of the pulse. In such instances, the IR receiver encounters difficulty in distinguishing the symbols, which results in an increase in the bit error rate (BER). Thus, there is a need for an alternative format to the traditional IR formats for devices such as keyboards and pointing devices, which cannot be operated in the traditional format, such as the 4 PPM scheme. Furthermore, there is need for a transmission technique that improves the BER, and a format that operates without a dedicated IR receiver microprocessor.

SUMMARY OF INVENTION

The disadvantages heretofore associated with the prior art, are overcome by the present invention of a data structure comprising a header portion having a plurality of fields and an expandable payload portion, wherein the data structure utilizes a five pulse position modulation (5PPM) technique for transmitting the header portion and the

expandable payload portion. In a preferred embodiment, the last position of a 5PPM signal is set to a "low" bit. Such an arrangement allows a receiver to decode the received PPM signal based on the rising edges of the pulses, without determining the length of the pulses, thereby allowing the receiver to be designed with fewer, and lower
5 cost components. The inventive data structure can advantageously be used as an infrared signal protocol for remote control of remote control devices such as a wireless keyboard or pointing device.

The plurality of fields are distributed in a three-byte header and comprise a preamble, identification (ID), mode, power flag, reserved bit, repeat field, payload size
10 and check sum. By setting all the bits in specific fields to a high state, the payload portion is expandable from 1 byte up to three bytes in length. The payload portion is used to carry scan codes and key flags for keyboards and X and Y coordinates for a pointing device.

Thus, the inventive IR signaling protocol allows an IR receiver's software to
15 receive traditional IR signaling protocols, as well as providing time between packets for transmission of RF pulses from a RF remote device. Additionally, the data structure allows set-top boxes to operate without a dedicated IR receiver microcontroller, and provides expandability and flexibility above the physical layer.

20 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is described with reference to the accompanying drawings, wherein:

FIG. 1 illustrates an infrared (IR) signal receiver of the present invention;

FIG. 2 illustrates a general packet format for an infrared signal protocol in
25 accordance with the present invention;

FIG. 3 illustrates an IR signaling protocol defining a packet for a keyboard device in accordance with the present invention;

FIG. 4 illustrates an IR signaling protocol defining a packet for a pointing device in accordance with the present invention;

FIG. 5 illustrates a timing diagram of a packet in accordance with the present
30 invention;

FIG. 6 illustrates a timing diagram of a symbol in accordance with the present invention; and

FIG. 7 illustrates a data stream of IR 5PPM packetized information in accordance with the present invention.

Identical reference numerals have been used to designate elements that are common to the figures.

5

DETAILED DESCRIPTION OF THE INVENTION

The invention will be primarily described within the context of an infrared (IR) receiver that receives IR signals such as a TEMIC™ TSOP1156 IR receiver. However, it will be appreciated by those skilled in the art that the invention is well suited to any
10 system having a receiver capable of detecting 300 microsecond (usec) pulses, which are defined by six or more carrier cycles per pulse.

FIG. 1 depicts an infrared (IR) signal receiver system 100. Specifically, a remote control device 102 transmits at least one IR signal packet 110 to an IR receiver 104. The remote control device 102 comprises a processing unit 120, memory 124,
15 modulator 122, and support circuits 128 for collectively generating infrared pulsed for emission through a light emitting diode (LED) 130. In particular, each packetized IR signal 110 is generated via the remote control device 102 such as an IR keyboard or pointing device. The processing unit 120 of the remote control device 102 capable of providing a stream of bits that are modulated by 5 pulse position modulation software
20 126 via the modulator 122. In a preferred embodiment, the carrier frequency is 56.875 KHz. The modulated IR signal is then transmitted via the LED 130 to IR receiver 104. The IR receiver comprises an IR port 132, demodulator 134, receiver processing unit 136, memory 138, support circuits 139, and a decoder 140. In particular, the IR packet is received by the IR port 132 for demodulation in the demodulator 134. The
25 demodulated signal i.e., baseband signal is then processed by the receiver processing unit 136, memory 138, support circuits 139, and decoder 140, and then displayed on an output device such as a monitor (not shown) coupled to the IR receiver 104.

FIG. 2 depicts a general packet format for an infrared signal protocol of the present invention. In particular, the IR signaling protocol is an expanded packet
30 protocol that is transmitted in a packet 110 of bytes 202₁ through 202_m (collectively bytes 202), where each byte 202 has n-bits 204₁ through 204_n (collectively 8-bits 204). In the preferred embodiment, each byte 202 comprises 8 bits 204. The packet 110 further comprises a header portion 203 and a payload portion 205. The header portion

001501 00353550

203 is defined in the first three bytes 202₁₋₃ and the payload portion 205 is defined by remaining bytes 202_{4-m}. In general, the header portion 203 comprises information to define the characteristics of the payload portion 205, route the packet 110, and perform error checking. The header portion 203 is a fixed length to allow a decoder (not shown) of an IR receiver 104 to find and translate the header portion 203. The payload portion 205 comprises information defined by a user such as a keyboard character or pointing device direction, and is variable in length.

In particular, the header portion 203 comprises a plurality of fields 207 including a preamble 206, ID 208, mode 210, power flag 212, reserved bit 214, repeat 216, payload size 218, and a checksum 220. The packet is transmitted from the most significant bit (MSB) and for purposes of discussion herein, the plurality of fields 207 will be discussed in order beginning with the MSB of each byte 202. The preamble 206 is designated as the first 6 bits 204 of the first byte 202. The purpose of the preamble 206 is to specify a target device for IR reception. Such targets illustratively include a television, video cassette recorder, AM/FM, camcorder, auxiliary, phono, tape, CD, satellite/cable, ASCII terminal, and the like. The traditional IR preamble is 4 bits wide, however the preamble 206 of the present embodiment adds two additional bits for a total of 6 bits, thereby allowing for greater device selection. Further extension of the preamble 206 is also possible by enabling preamble expansion capabilities. This is accomplished by setting the 6 bits in the preamble 206 "high". When all the preamble bits are set high, the payload portion 205 is extended an extra byte (i.e., expandable payload 102₅) making the preamble 206 an 8-bit field. Thus, the devices available for selection is increased from 63 devices to 256 devices.

The ID field 208 is set forth as the least significant bits (LSB) 204₇₋₈ in the first byte 202₁. The ID field 208 is an identification field that is user programmable and provides support for several devices to operate in close vicinity. For example, if a game is supported with multiple input devices, by setting the ID field 208, an IR receiver may differentiate one keyboard from another. Two bits are allotted to the ID field 208 because if an excessive number of devices are used simultaneous in close vicinity, their respective signals may destructively interfere with each other. In order to overcome this problem, the present embodiment allows for the ID field 208 to be expanded in the payload portion 205 in a similar manner as the preamble 206. Specifically, both bits 204₇ and 204₈ are set high, and an extra byte 202 is added to the payload portion 205. If

the preamble 206 is not expanded, then the expanded byte for the ID field 208 is the fifth byte 202₅. However, if the preamble field 206 is also expanded, then the expanded ID field follows the expanded preamble field as the sixth byte 204₆. Thus, in an expanded condition, the ID field 208 is capable of providing a possibility of 256

5 devices.

The second byte 202₂ of the header portion 203 comprises a second portion of the plurality of fields 207. The mode field 210 comprises four bits 204_{1,4} and is utilized to set the payload type. Such modes include designations for a keyboard, basic pointing device, a precision pointing device, and the like. Such designations typically include

10 mode 1 as the keyboard, mode 2 as the pointing device, and mode 3 as the precision pointing device. The mode field 210 allows a decoder in an IR receiver to route a packet without completely decoding the payload. The power field 212 is the fifth most significant bit 204₅ of the second byte 202₂. The power bit 212 is a flag that is set when a power source, such as a battery, in the transmitter of the keyboard or pointing device

15 is below and acceptable operating level. Thus, the power bit 212 alerts a user that there is reduce range or an increase in the bit error rate (BER) due to low power. A reserved bit 214 is the sixth bit 204₆ in the second byte 202₂, is held constantly low, and is reserved for future use.

The repeat field 216 is defined by the remaining least significant bits 204_{7,8} of

20 the second byte 202₂. The repeat field 216 is a power saving tool and may be used for a transmitting device (e.g., keyboard/mouse) to indicate first presses of a button. In the preferred embodiment, if the repeat field bits are set to 01, the bits 204_{7,8} indicate a first transmission of a character from a keyboard or direction from a pointing device. If the repeat field bits are set to 11, the bits 204_{7,8} indicate that a shortened repeat sequence is

25 transmitted instead of a full packet payload. Conversely, if bits 204_{7,8} are set to either 00 or 10, then the repeat field 216 is ignored, and a full packet payload is transmitted. The shortened packet includes in the header fields 207, the preamble 206, ID 208, mode 210, a two-bit checksum 220 and the repeat field 216 set to 1 and 0. The remaining portion of the packet 110 is excluded unless the expanded preamble 224 and/or

30 expanded Id 226 are set. Thus, the effective number of bits transmitted (without the expansion fields) is 16, versus 40 for the typical keyboard packet.

The third byte 202₃ of the header portion 203 comprises the payload size field 218 located in the first 4 most significant bits, and the checksum 220 in the remaining

00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000

four bits. The payload size field 218 stores the number of bytes in the payload portion 205. As previously discussed, the payload portion 205 of the packet 110 is variable in length. The payload size field 218 provides the decoder in the IR receiver with the exact payload size, and thereby eliminates the need for the decoder to make such calculations. If either the preamble and/or the ID fields 206 and/or 208 are in an expansion mode, then the payload size field 218 accounts for the increased bit count. The checksum field 220 is utilized to verify data integrity. When all the nibbles (i.e., 4 bits of a byte) of a packet 110 are added together, including the checksum 220, the result should be zero when the carry is ignored. In an instance where the checksum is not a zero value, then a bit error has occurred and the packet must be retransmitted.

The plurality of fields 207 of the header portion 203 for the infrared signal protocol format is the same regardless of the type of infrared device. In contrast, the payload portion 205 of the packet 110 varies according to the type of device. The fourth byte 202₄ represents the payload 222 and is present in each packet 110 unless the repeat field 216 has both bits set high. The fifth and sixth bytes 202₅ and 202₆ are included in the payload portion 205 of the packet 110 only in the select circumstances discussed above.

FIGS. 3 - 4 each depict an IR signaling protocol defining a packet format for a specific device. Each IR signaling protocol follows the embodiment as described in FIG. 2. In particular, FIG. 3 depicts an IR signaling protocol defining a packet 300 for a keyboard device. The IR signaling protocol for the keyboard comprises the three-byte header portion 203 having the plurality of fields 207 and the payload portion 205 as shown in the general format embodiment. In this instance, the mode field 210 has the least significant bit 204₄ set high and the remaining bits 204₁₋₃ set low to signify a keyboard device. The payload portion 205 is defined by two bytes 202₄ and 202₅. Furthermore, each bit of the payload field 222 represents a specific keyboard function. Specifically, the payload field 222 comprises an ASCII flag 302 in bit 204₁ and a plurality of key flags 315 including a CAPS-LOCK flag 308 in bit 204₄, a Shift flag 310 in bit 204₅, a Control (CTRL) flag 312 in bit 204₆, an ALT flag 314 in bit 204₇, and a Function flag (FN) 316 in bit 204₈. The two non-designated flags 304 and 306 in bits 204₂ and 204₃ are reserved for future requirements and are kept in a low state. The ASCII flag 302 is used in conjunction with the keyboard payload. That is, when the ASCII flag bit 302 is set high, a specific 8-bit scan code from a key selected by a user

09585803 053100
001250 00350560

5

10

20

25

	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2433	2434	2435	2436	2437	2438	2439	2440	2441	2442	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

instance where all pointer buttons are released and no other pointer device is operated, a single zero-value pointer packet is transmitted. Such zero-value signal generates a "button-up" message in the IR receiver. Additionally, the remaining four bits 204₅₋₈ of the payload portion 205 are reserved for future use and set in a low state.

5 Transmitted coordinates for a pointing device represent a delta from a fixed location. If the coordinates are absolute with respect to a point, then the bit in the absolute field 408 is set high. Conversely, if the delta is relative to a previous transmission, then the coordinates are relative and the bit in the absolute field 408 is set low. The transmitted coordinates are X and Y coordinates 412 and 414, which are
 10 represented by the fifth byte 102₅ and sixth byte 102₆, respectively. Positive numbers, such as 0x7F = +127, and 0x01 = +1, represent movements left or up and a negative numbers such as 0xFF = -1, 0x80 = -128, represent movements right or down. In this manner, each packet 400 represents a numerical value to define movement and/or a button as selected on a pointing device by a user. Accordingly, as a user moves the
 15 pointing device in real time, a plurality of packets 400 are sequentially sent from the pointing device to the IR receiver for decoding.

The IR signaling protocol is designed in compliance with the Open Systems Interconnection (OSI) standards and the Infrared Data Association (IrDA). Specifically, point-to-point communications between the IR devices utilize half duplex serial IR
 20 communications links through free space. As discussed previously, each packet is transmitted serially, starting with the most significant bit. In order to overcome the deficiencies of utilizing 4 pulse position modulation (4 PPM), the inventive protocol is transmitted via a 5 pulse position modulation (5 PPM) technique, where the last pulse position is empty. The following Table 2 correlates each data bit pair with a
 25 corresponding 5 PPM data symbol.

Data Bit Pair (DBP)	5 PPM Data Symbol
00	10000
01	01000
10	00100
11	00010

Table 2

Logical "1" represents a chip duration when the transmitting LED is emitting light, while a logical "0" represents a chip duration when the LED is off. In this
 30 manner, a packet containing illustratively 40 bits representing a letter, number, or

command selected by a user on the keyboard is represented by 20 symbols, modulated onto a carrier, and transmitted from an infrared serial port on the keyboard to the set-top box.

FIG. 5 depicts a timing diagram of a packet 110. The packet 110 comprises a mark 502, a space 504 and a plurality of symbols 506_{1-n} (collectively symbols 506). In a preferred embodiment, the mark 502 is 600 microseconds in length and is utilized to alert the decoder of an incoming packet. The space 504 follows the mark 502 and is 1.2 milliseconds long. Specifically, the mark 502 and space 504 are used in conjunction to set a correct amount of gain in the circuit so that the receiver can differentiate what is just random noise from the true signal. The remaining portion of the packet 110 is the plurality of symbols 506. In the preferred embodiment, the packet 110 comprises 20 symbols each representing two bits. Each symbol 506 has a period of 1.5 milliseconds. As such, the fixed packet length for a 40-bit packet 110 is 31.8 milliseconds.

FIG. 6 depicts a timing diagram of a symbol 506. Specifically, each symbol 506 is comprised of five equal time slots or "chips" 602₁₋₅ (collectively chips 602), where each chip is a pulse position. Furthermore, only one of the five chip positions of each symbol 506 may contain IR modulation as disclosed by each 5PPM data symbols in Table 2. For example, the data bit pair 01 has a 5PPM data symbol of 01000 where the only high pulse is set in the second chip 602₂. Furthermore, the fifth chip 602₅ is always held low. One advantage of 5PPM versus 4PPM is that two IR pulses will never occur back to back. For instance, if the data pairs 11 and 00 are sequentially transmitted, then the pulses 00010 10000 would be sent under the 5PPM technique, as opposed to 00011000 being sent under the 4PPM technique. Under the 4 PPM scheme, a receiver must check the duration of the pulses to determine that the "11" pulse is actually comprised to two consecutive "1" pulses. However, under the 5 PPM scheme, the IR receiver knows that two consecutive "1" pulses will not occur. Accordingly, the IR receiver may process only the rising edges of the transmission, and have a fixed count of the number of edges in the transmission, as opposed to a varied amount (due to back-to-back pulses) under the 4PPM technique. Each of the chips 602 has a fixed time length of 298.901 microseconds per pulse. The carrier frequency is 56.875 KHz. Therefore each pulse comprises 17 cycles per pulse and each symbol 506 is approximately 1.5 milliseconds in length, as discussed in FIG. 5.

In operation, the IR signaling protocols as depicted in FIGS. 1-4, are transmitted from the remote IR device 102 to a decoder of the IR receiver 104 as per the 5PPM technique. Data encoding for transmission is performed by most significant bit first. The decoder searches for the 600 usec mark 502 and 1.2 msec space 504 to distinguish the inventive expanded packet format from a traditional IR format and set the required gain to overcome any random noise. Thereafter, the 3-byte header portion 203, beginning with the preamble 206 via symbols 506₁₋₁₂, may be decoded. From the header portion 203 the size is determined from the payload size field 218 and then the payload portion 205 (transmitted in the remaining symbols 506_{13-n} of the packet 110) is decoded. In the instance where the device is a keyboard without utilizing expandable fields or repeating a packet, 40 bits, i.e., 20 symbols 506₁₋₂₀ are transmitted and then decoded. Additional symbols are transmitted in instances where the expandable fields (bytes) are present. In the instance where the device is a pointing device, 48 bits, i.e., 24 symbols are transmitted and decoded.

FIG. 7 depicts a data stream of IR 5PPM packetized information 700. In particular, the data stream 700 comprises a plurality of packets 110₁ through 110_p (collectively packets 110) and a minimum interval 702 of 10 milliseconds between each of the packets 110. The minimum 10 msec interval 702 allows for transmission of a radio frequency (RF) pulse during this time. A person skilled in the art will recognize the interval 702 may be a longer period, however such increased time is at the expense of throughput. RF pulses may be transmitted to a receiver by other RF devices such as in a Direct Satellite System (DSS) and the like. In this manner, both IR and RF formats may co-exist, thereby enabling a user to transmit both IR and RF signals using one remote device.

It should be apparent to those skilled in the art that a novel method and apparatus for an infrared signaling protocol having a header and expandable payload has been provided. Such IR signaling protocol is transmitted from an IR keyboard or pointing device to an IR receiver as a sequence of symbols using 5 pulse position modulation. Although various embodiments that incorporate the teachings of the present invention have been shown and described in detail herein, those skilled in the art can readily devise many other varied embodiments that still incorporate these teachings.

CLAIMS

What is claimed is:

1. A signaling apparatus, comprising:
data input means for receiving user input;
5 a memory having signaling data stored therein;
a processor, coupled to the memory and the data input means, for generating a
signal sequence in response to a user input, the signal sequence comprising a 5 pulse
position modulated (5PPM) signal;
a modulator, coupled to the processor, for modulating the signal sequence onto a
10 carrier signal;
a transmitter, coupled to the modulator, for transmitting the modulated signal
sequence, including the 5 pulse position modulated signal.
2. The apparatus of claim 1, wherein a last position of said 5PPM signal is
15 always set to a low bit.
3. The apparatus of claim 1, wherein said signal sequence is defined by a
signaling protocol having a header portion and a payload portion.
- 20 4. The apparatus of claim 3, wherein said header portion comprises a plurality
of fields for defining said payload portion.
5. The apparatus of claim 3, wherein said payload portion is a variable bit
stream.
25
6. The apparatus of claim 1, wherein said data input means comprises a
keyboard.
7. The apparatus of claim 1, wherein said signal sequence defines a position on
30 a display of an image display device.
8. In a control system having a signal transmitter for encoding and transmitting
control signals and a signal receiver for receiving and decoding the control signals, the

007220" 00888560

a payload portion; and

5 said payload portion,

10 9. The data structure of claim 8, wherein said payload portion indicates a keyboard character.

15

12. In a control system having a signal transmitter for encoding and transmitting
20 control signals and a signal receiver for receiving and decoding the control signals, the
receiver comprising means for decoding a control signal in response to rising edge of
pulses in the control signal, a method of providing control signals, comprising:

generating a signal sequence in response to a user input; and

converting said signal sequence into a plurality of symbols in accordance with a

25 5 pulse position modulated (5PPM) scheme,

wherein said converting step comprises setting a last position of each said 5 PPM symbol to a low bit.

13. The method of claim 12, further comprising the step of defining said symbol
30 sequence by a signaling protocol having a header portion and a payload portion.

14. The method of claim 12, further comprising the step of sending bits representing a keyboard character as said payload portion.

a) $\alpha = 0.05$		b) $\alpha = 0.01$		c) $\alpha = 0.001$	
Test	Power	Test	Power	Test	Power
1. χ^2	0.80	1. χ^2	0.95	1. χ^2	0.99
2. χ^2	0.80	2. χ^2	0.95	2. χ^2	0.99
3. χ^2	0.80	3. χ^2	0.95	3. χ^2	0.99
4. χ^2	0.80	4. χ^2	0.95	4. χ^2	0.99
5. χ^2	0.80	5. χ^2	0.95	5. χ^2	0.99
6. χ^2	0.80	6. χ^2	0.95	6. χ^2	0.99
7. χ^2	0.80	7. χ^2	0.95	7. χ^2	0.99
8. χ^2	0.80	8. χ^2	0.95	8. χ^2	0.99
9. χ^2	0.80	9. χ^2	0.95	9. χ^2	0.99
10. χ^2	0.80	10. χ^2	0.95	10. χ^2	0.99
11. χ^2	0.80	11. χ^2	0.95	11. χ^2	0.99
12. χ^2	0.80	12. χ^2	0.95	12. χ^2	0.99
13. χ^2	0.80	13. χ^2	0.95	13. χ^2	0.99
14. χ^2	0.80	14. χ^2	0.95	14. χ^2	0.99
15. χ^2	0.80	15. χ^2	0.95	15. χ^2	0.99
16. χ^2	0.80	16. χ^2	0.95	16. χ^2	0.99
17. χ^2	0.80	17. χ^2	0.95	17. χ^2	0.99
18. χ^2	0.80	18. χ^2	0.95	18. χ^2	0.99
19. χ^2	0.80	19. χ^2	0.95	19. χ^2	0.99
20. χ^2	0.80	20. χ^2	0.95	20. χ^2	0.99
21. χ^2	0.80	21. χ^2	0.95	21. χ^2	0.99
22. χ^2	0.80	22. χ^2	0.95	22. χ^2	0.99
23. χ^2	0.80	23. χ^2	0.95	23. χ^2	0.99
24. χ^2	0.80	24. χ^2	0.95	24. χ^2	0.99
25. χ^2	0.80	25. χ^2	0.95	25. χ^2	0.99
26. χ^2	0.80	26. χ^2	0.95	26. χ^2	0.99
27. χ^2	0.80	27. χ^2	0.95	27. χ^2	0.99
28. χ^2	0.80	28. χ^2	0.95	28. χ^2	0.99
29. χ^2	0.80	29. χ^2	0.95	29. χ^2	0.99
30. χ^2	0.80	30. χ^2	0.95	30. χ^2	0.99
31. χ^2	0.80	31. χ^2	0.95	31. χ^2	0.99
32. χ^2	0.80	32. χ^2	0.95	32. χ^2	0.99
33. χ^2	0.80	33. χ^2	0.95	33. χ^2	0.99
34. χ^2	0.80	34. χ^2	0.95	34. χ^2	0.99
35. χ^2	0.80	35. χ^2	0.95	35. χ^2	0.99
36. χ^2	0.80	36. χ^2	0.95	36. χ^2	0.99
37. χ^2	0.80	37. χ^2	0.95	37. χ^2	0.99
38. χ^2	0.80	38. χ^2	0.95	38. χ^2	0.99
39. χ^2	0.80	39. χ^2	0.95	39. χ^2	0.99
40. χ^2	0.80	40. χ^2	0.95	40. χ^2	0.99
41. χ^2	0.80	41. χ^2	0.95	41. χ^2	0.99
42. χ^2	0.80	42. χ^2	0.95	42. χ^2	0.99
43. χ^2	0.80	43. χ^2	0.95	43. χ^2	0.99
44. χ^2	0.80	44. χ^2	0.95	44. χ^2	0.99
45. χ^2	0.80	45. χ^2	0.95	45. χ^2	0.99
46. χ^2					

ABSTRACT

An apparatus and method for providing control signals, comprising a processor coupled to a memory, for generating a signal sequence. The processor encodes the signal sequence into a plurality of symbols using a 5 pulse position modulated (5PPM) scheme. Advantageously, the last position of each symbol encoded under the 5 PPM scheme is set to a low bit. The symbol sequence represents a signaling protocol having a payload portion and a header portion, wherein the header portion comprises a plurality of fields for defining the payload portion. The payload portion indicates keyboard characters or coordinates for a pointing device.

007E30" E2222255

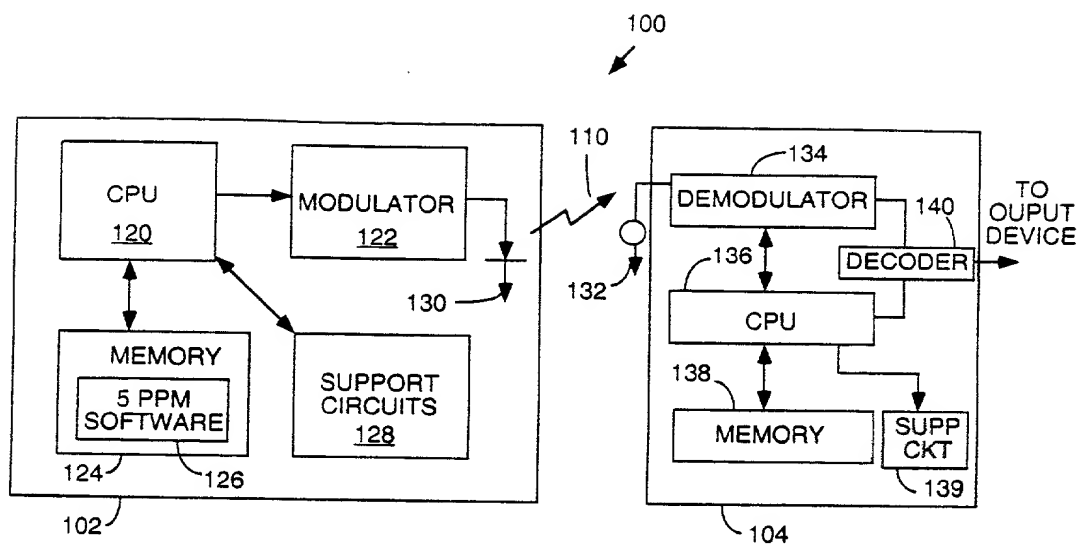


FIG. 1

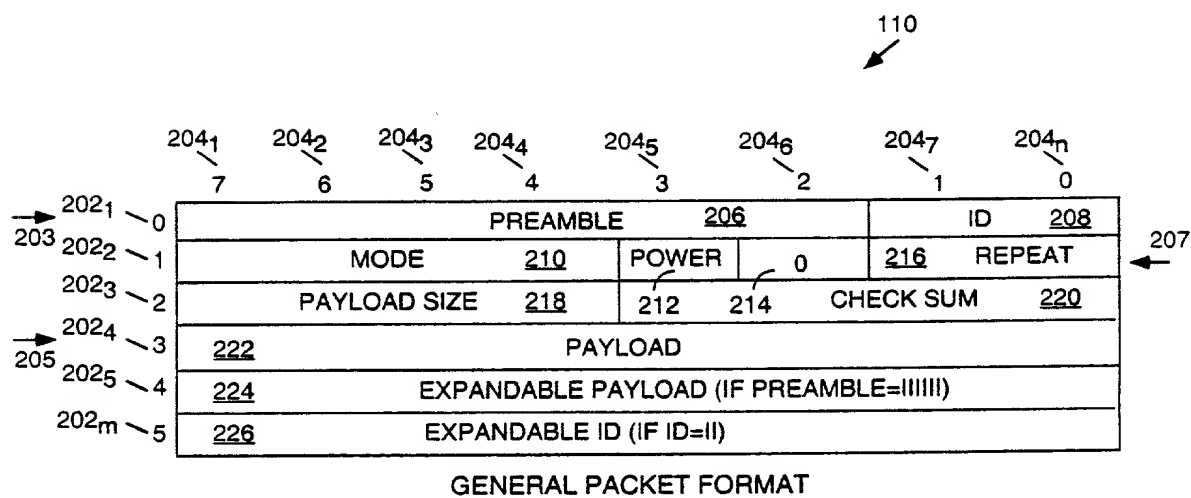


FIG. 2

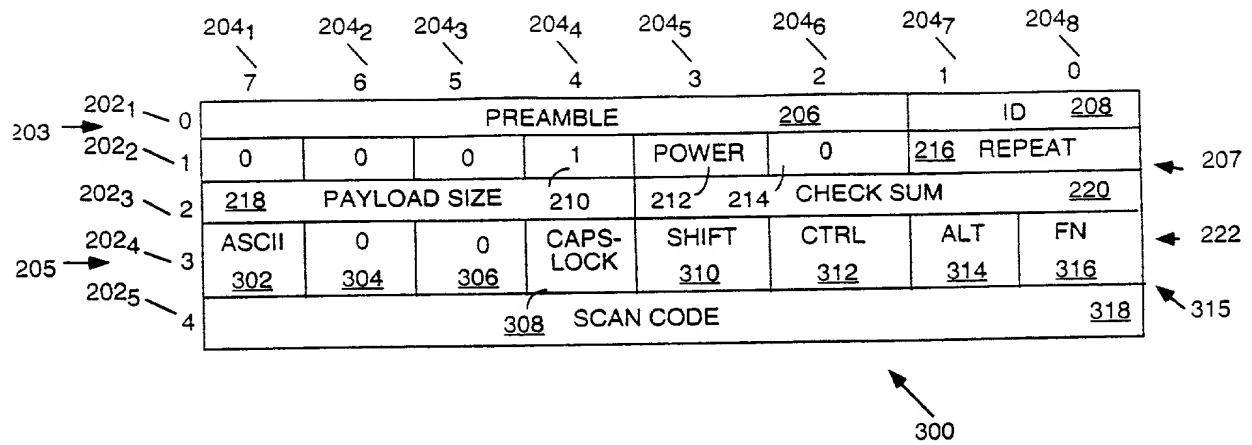


FIG. 3

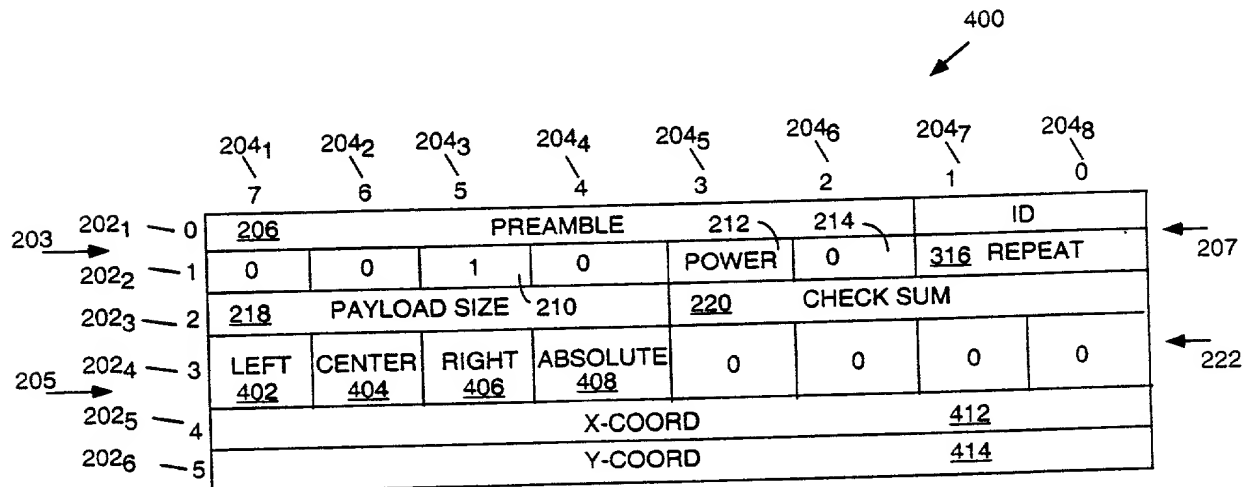


FIG. 4

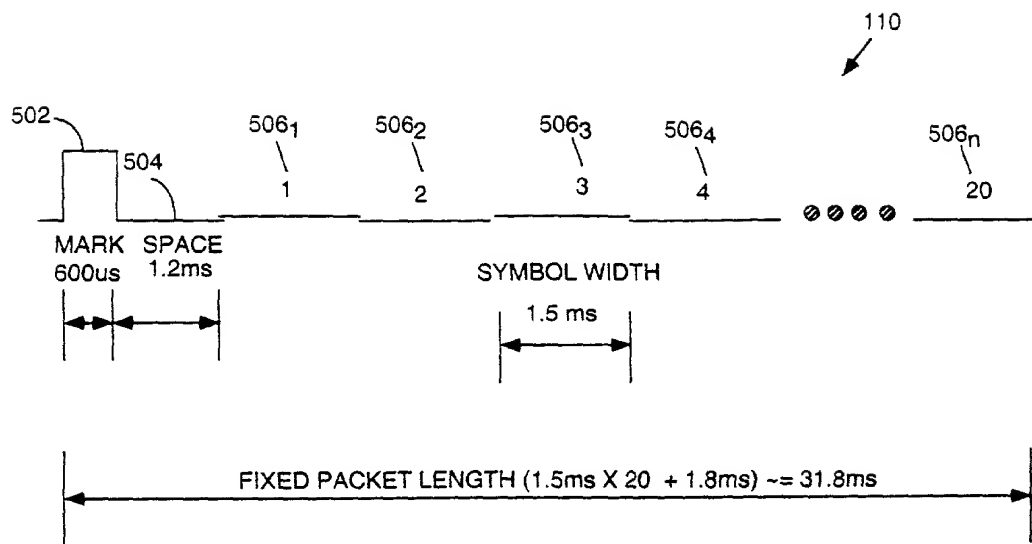


FIG. 5

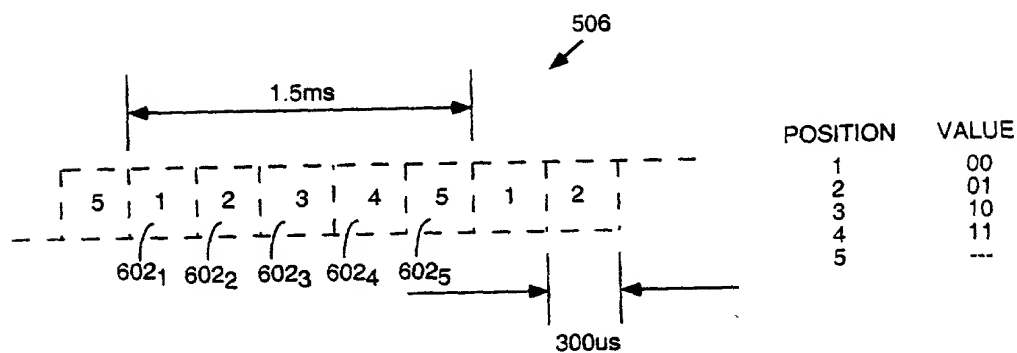


FIG. 6

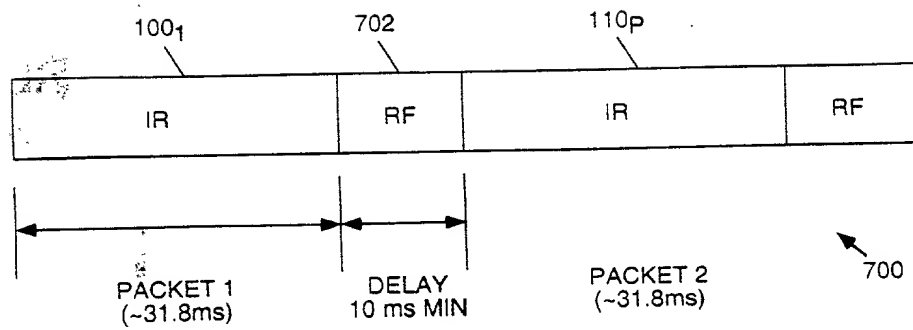


FIG. 7